

Genset  
Model:

## YXP1500RSC & RS

X-Series

Enclosed set



Open Set



Frequency	Phase	Power Factor	Prime Output	Standby
50Hz	3	0.8	1500 kVA / 1200 kW	1650 kVA / 1320 kW

### Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

### Design Features

- High quality assembly, providing stiffness and low vibration
- Powder coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

### Design Standards

- CE marking
- ISO8528.5
- GB/T2820.5
- ISO 9001

### Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank with fully banded base protection. **(enclosed unit only)**
- Fuel level sensor **(enclosed set only)**
- Auto start control system with electronic digital control module DSE7420
- Output circuit breaker. **(enclosed set only)**
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 24V starter battery with leads and switch

### Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs
- Forklift holes in base

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
+44 1977 688155 • sales@yorpower.com

[www.yorpower.com](http://www.yorpower.com)


## Engine data

Engine brand	Perkins	Total coolant capacity	210 Litres
Engine model	4012-46TAG2A	Total lube oil capacity	177 Litres
Engine speed	1500 RPM	Bore	160 mm
Cylinders	12	Stroke	190 mm
Aspiration	Turbocharged	Compression ratio	13.6:1
Combustion system	Direct injection	Fuel cons. @ 110% standby load	335 l/hr
Displacement	45.8 Litres	Fuel cons. @ 100% Prime load	301 l/hr
Governor type	Electronic	Fuel cons. @ 75% Prime load	237 l/hr
Cooling System	Water-cooled	Fuel cons. @ 50% Prime load	162 l/hr

## Alternator data


Alternator brand	Leroy Somer	Winding pitch	2/3
Alternator model	LSA50.2L8	Number of wires	6
Excitation	AREP	AVR	D350
Insulation class	H	Voltage regulation	± 0.25%
Drip proof protection	IP23	Telephone Interference	TIF <50

## Enclosed set data

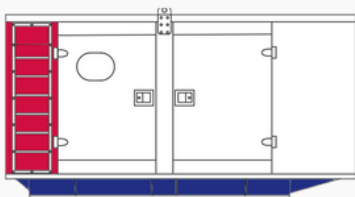

L X W x H (mm)	Weight	Fuel tank	Noise@7M
12192 x 2438 x 2896	21108 kg	2100 Litres	83 db(A)

## Open set data



L X W x H (mm)	Weight	Fuel tank	Noise@7M
5333 x 2200 x 2449	10204 kg	N/A	N/A

\*\* The images are for illustration purposes only.

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
 +44 1977 688155 • sales@yorpower.com

[www.yorpower.com](http://www.yorpower.com)