

Genset  
Model:

## YCAT275RSC

### Enclosed set



Frequency	Phases	Power Factor	Prime Output	Standby Output
50Hz	3	0.8	240 kVA / 192 kW	260 kVA / 208 kW

### Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

### Design features

- High quality assembly, providing stiffness and low vibration
- Power coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

### Design Standards

- CE marking
- ISO8528-1995
- GB/T2820-1997
- ISO 9001:2008 Registered Company

### Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank with base protection.
- Fuel level sensor
- Auto start control system with electronic digital control module.
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V starter battery with leads and switch

### Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs

\*\* The images above are for illustration purposes only.

## Engine data


Engine brand	Caterpillar	Total coolant capacity	13.9 Litres
Engine model	C9 ACERT	Total lube oil capacity	TBC
Engine speed	1500 RPM	Cooling air flow	TBC
Number of cylinders	6 In Line	Exhaust gas flow	42.2 m <sup>3</sup> /min
Aspiration	Turbocharged air to air aftercooled	Exhaust gas temperature	500°C
Displacement	8.8 Litres	Fuel cons. @ 100% Prime load	57.5 l/hr
Governor type	Adem™ A4	Fuel cons. @ 75% Prime load	44.0 l/hr
Cooling system	Water Cooled	Fuel cons. @ 50% Prime load	31.5 l/hr

## Alternator data

Alternator brand	CAT	Number of wires	12
Alternator model	LC5014H	AVR model	R250
Excitation	Shunt	Voltage regulation	± 1.0 %
Insulation class	H	Total Harmonic distortion	THF 2%
Drip proof protection	IP23	Telephone interference	TIF 50%
Winding pitch	2/3 (N° 6 or N° 6S)	Flanges and shield	Cast Iron

## Enclosed set data

## Open set data

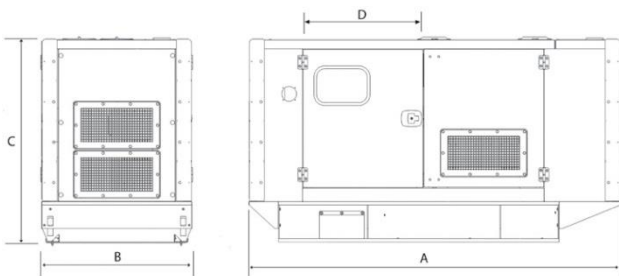

\*\* Due to constant innovation, design and specifications are subject to change without notice.

L x W x H (mm)	Weight	Fuel Tank	Noise@7M	L x W x H (mm)	Weight	Fuel Tank	Noise@7M
3988 x 1208 x 1779	2447 kg	438 Litres	68.5 db	1540 x 970 x 1361	976 kg	161 Litres	TBC

# YORPOWER

**Tel: +44 (0) 1977 688155**  
**Fax: +44 (0) 1977 688158**

YorPower Ltd. | Unit 2 Hurricane Close | Sherburn in Elmet | LS25 6PB | United Kingdom  
 E-mail | sales@yorpower.com | Web | www.yorpower.com  
 Registered in England and Wales No. 7035780

