

Genset  
Model:

## YXP1500RSC & RS

X-Series

Enclosed set



Open Set



*\*\* The images are for illustration purposes only.*

Frequency	Phase	Power Factor	Prime Output	Standby
50Hz	3	0.8	1500 kVA / 1200 kW	1650 kVA / 1320 kW

### Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity.

### Design Features

- High quality assembly, providing stiffness and low vibration.
- Powder coated steel. Corrosion and scratch resistant.
- Compact and long service life.
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty.

### Design Standards

- CE marking
- ISO8528.5
- GB/T2820.5
- ISO 9001

### Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings.
- Integral fuel tank with bunded base protection (**enclosed unit only**).
- Fuel level sensor (**enclosed set only**).
- Auto start control system with electronic digital control module DSE7420
- Output circuit breaker. (**enclosed set only**).
- Emergency stop button.
- High engine temperature and low oil pressure shutdown system.
- 24V starter battery with leads and switch.

### Acoustic canopy features

- Water and dust proof design.
- Door locks.
- High quality sound absorbing and fire retardant inner material.
- Lifting lugs.

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
+44 1977 688155 • sales@yorpower.com

**[www.yorpower.com](http://www.yorpower.com)**


## Engine data

Engine brand	Perkins	Total coolant capacity	207 Litres
Engine model	4012-46TAG2A	Total lube oil capacity	177 Litres
Engine speed	1500 RPM	Bore	160 mm
Cylinders	12	Stroke	190 mm
Aspiration	Turbocharged and air to air charge cooled	Compression ratio	13 : 1
Combustion system	Direct injection	Fuel cons. @ 110% standby load	341 l/hr
Displacement	45.842 Litres	Fuel cons. @ 100% Prime load	310 l/hr
Governor type	Electronic	Fuel cons. @ 75% Prime load	234 l/hr
Cooling System	Water-cooled	Fuel cons. @ 50% Prime load	157 l/hr

## Alternator data


Alternator brand	Leroy Somer	Winding pitch	2/3
Alternator model	LSA50.2L8	Number of wires	6
Excitation	AREP & PMG	AVR	D350
Insulation class	H	Voltage regulation	± 0.25%
Drip proof protection	IP23	Power Factor	0.8

## Enclosed set data

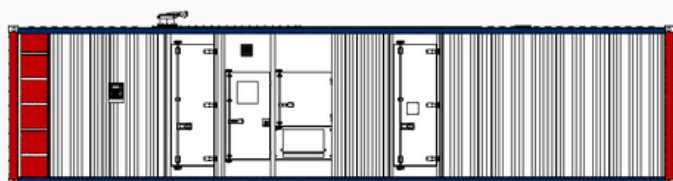

L X W x H (mm)	Weight	Fuel tank	Noise@7M
12192 x 2438 x 2896	21108 kg	2400 Litres	83 dBA

## Open set data

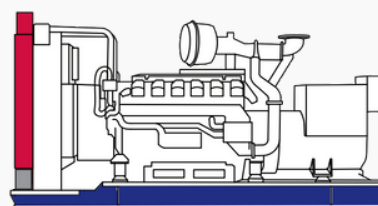

\*\* The images are for illustration purposes only.

L X W x H (mm)	Weight	Fuel tank	Noise@7M
5333 x 2200 x 2449	10204 kg	N/A	N/A

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
+44 1977 688155 • sales@yorpowers.com

[www.yorpowers.com](http://www.yorpowers.com)