

Genset
Model:

YXP80RSC & RS

X-Series

Enclosed set



Open Set



Frequency	Phase	Power Factor	Prime Output	Standby
50Hz	3	0.8	80 kVA / 64 kW	88 kVA / 70 kW

Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

Design Features

- High quality assembly, providing stiffness and low vibration
- Powder coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

Design Standards

- CE marking
- ISO8528.5
- GB/T2820.5
- ISO 9001

Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank with fully banded base protection.
- Fuel level sensor
- Auto start control system with electronic digital control module DSE4520
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V starter battery with leads and switch

Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs
- Forklift holes in base

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom
+44 1977 688155 • sales@yorpower.com

www.yorpower.com


Engine data

Engine brand	Perkins	Total coolant capacity	13 Litres
Engine model	1104A-44TG2	Total lube oil capacity	8 Litres
Engine speed	1500 RPM	Bore	105 mm
Cylinders	4	Stroke	127 mm
Aspiration	Turbocharged	Compression ratio	17.25:1
Combustion system	Direct injection	Fuel cons. @ 110% standby load	20.5 l/hr
Displacement	4.4 Litres	Fuel cons. @ 100% Prime load	18.7 l/hr
Governor type	Mechanical	Fuel cons. @ 75% Prime load	14 l/hr
Cooling System	Water	Fuel cons. @ 50% Prime load	9.7 l/hr

Alternator data


Alternator brand	Leroy Somer	Winding pitch	2/3
Alternator model	LSA44.3S3	Number of wires	12
Excitation	SHUNT	AVR	R250
Insulation class	H	Voltage regulation	± 0.5%
Drip proof protection	IP23	Telephone Interference	TIF <50

Enclosed set data

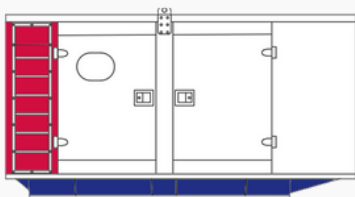

L X W x H (mm)	Weight	Fuel tank	Noise@7M
2788 x 1165 x 1710	1696 kg	180 Litres	69 db(A)

Open set data



L X W x H (mm)	Weight	Fuel tank	Noise@7M
2233 x 870 x 1342	1115 kg	260 Litres	N/A

** The images are for illustration purposes only.

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom
+44 1977 688155 • sales@yorpowers.com

www.yorpowers.com